

TeraPrint Produktunterlage

Gebrandete TeraPrint-Downloadunterlage

PRODUKT	Beachflag
UNTERLAGE	Flag Brandschutzzertifikat
TYP	fire_certificate
ORIGINALSEITEN	9
STAND	16.06.2026
DATEI	products/pole-flag/assets/documents/6e843f56cf2888f0bf4105eb4b63f8ebdced07d62cd7bb8d6ff960e159631852.pdf

Wichtig fuer die Produktion

Die folgenden Originalseiten bleiben in Format, Reihenfolge und Inhalt unveraendert.
Druckmass, Schnitt, Beschnitt, Sicherheitsbereiche und technische Vorlage wurden nicht veraendert.
Bei Zertifikaten, Datenblaettern und Pruefberichten bleiben Aussteller und Originalinhalte unveraendert.

TeraPrint Hinweis

Diese Datei ist lokal bei TeraPrint gespeichert und fuer den Kunden-Download vorbereitet.
Bitte bei Druckdaten immer die Massangaben und Beschnitt-/Sicherheitszonen der Originalvorlage beachten.
Bei Unsicherheit vor Bestellung oder Produktion TeraPrint kontaktieren.

Test laboratory for the fire behavior of building materials, Dipl.-Ing. (FH) Andreas Hoch
Testing, supervising and certifying body, authorized by the building supervision authority

TEST REPORT

PZ-Hoch-190938-2

for the proof of Fire behaviour according to DIN 4102, part 1

Translation of the German test report – no guarantee for translation of technical terms

company	Georg+Otto Friedrich Waldstraße 73 D-64868 Groß-Zimmern
description of samples	knitted fabric consisting of 100% polyester colour: white
name of the material	„Polyesterwirkware 51 g/m ² - 140 g/m ² “
sampling	by the company itself
content of request	Proof of flammability to classify building materials to class B1 “schwerentflammbar” according to DIN 4102, part 1
validity of test report	31.08.2024
result	The examined product meets with an area weight of 53 g/m² until 140 g/m² the requirements of class B1 for “schwerentflammbare” (hardly flammable) building materials according to DIN 4102, part 1 (May 1998) , suspended freely or with distance of >40 mm to same or other plain materials.

This test report includes 4 pages and 5 enclosures.

Remark: If the above mentioned building material is not used as product according to MBO § 2, Abs. 9, Ziffer 1, there is no need for a general building supervisory test report.

This test report is not valid if the examined building material is used as product in the meaning of state building prescriptions (MBO § 17, Abs. 3).

This test report does not replace an eventually necessary proof of applicability concerning building supervisory or building laws in the meaning of state building prescriptions. This has to be verified by:

- “allgemeine bauaufsichtliche Zulassung” (general building inspectorate approval) or by
- „allgemeines bauaufsichtliches Prüfzeugnis” (general building inspectorate certificate) or by
- “Zustimmung im Einzelfall” (exceptional approval)

This test report can underlie building supervisory procedures

- for regular building products for the prescribed proofs of conformity
- for non regular building products for the needed proofs of applicability.

This test report must not be published and copied without preceding agreement of the test laboratory and if agreed, only during validity and unchanged concerning appearance and contents.

1. Description of test material in condition as delivered

PN 29537: "Polyesterwirkware 51 g/m² - 140 g/m²" Artikel-No.: "6046"

-knitted fabric consisting of 100 % polyester (colour: white)-

There is no difference between side A and side B.

characteristic values determined by the test laboratory:

area weight: about 140 g/m² thickness: about 0,31 mm

PN 30068: "Polyesterwirkware 51 g/m² - 140 g/m²" Artikel-No.: "6046"

-knitted fabric consisting of 100 % polyester (colour: white)-

There is no difference between side A and side B.

characteristic values determined by the test laboratory:

area weight: about 53 g/m² thickness: about 0,22 mm

The testing laboratory is not provided with further details concerning composition of the tested building materials. Samples are deposited.

2. Preparation of samples

The samples were kept in climate chamber 23/50 until they reached constant weight.

3. Arrangement of samples

mounting: freely suspended

#2843: flaming side A in warp direction

PN 29537

#2844: flaming side B in weft direction

PN 29537

#2845: flaming side B in weft direction

PN 30068

4. Date of test

CW 39 in 2019

5. Results

The test has been examined according to DIN 4102 (Mai 1998)

line no.	Measurement	Result with the tested specimen					Dim.
	Test number	#2843	#2844	#2845	---	---	
	flamed direction	warp	weft	weft	---	---	
	flamed side	A	B	B	---	---	
1	Number of specimen arrangement acc. to. DIN 4102/T15, schedule 1	1	1	1	---	---	
2	Maximum flame height above bottom edge of the specimen	30	30	30	---	---	cm
3	Time ¹⁾	0:02	0:02	0:02	---	---	min:s
4	Burn through / melting Time ¹⁾	0:03	0:03	0:03	---	---	min:s
	Observations on the back side of the specimen						
5	Flames / Glowing Time ¹⁾	./.	./.	./.	./.	./.	min:s
6	Change of color Time ¹⁾	./.	./.	./.	./.	./.	min:s
7	Falling of burning droplets Start ¹⁾	---	---	---	---	---	min:s
	Extent	---	---	---	---	---	
8	sporadic falling of burning droplets ²⁾	---	---	---	---	---	
9	continuous falling of burning droplets ²⁾	./.	./.	./.	./.	./.	min:s

line no.	Measurement	Result with the tested specimen					Dim.
	Test number	#2843	#2844	#2845	---	---	
	flamed direction	warp	weft	weft	---	---	
	flamed side	A	B	B	---	---	
10	<u>Falling of burning droplets</u>	./.	./.	./.	./.	./.	min:s
	Start ¹⁾	./.	./.	./.	./.	./.	
	Extent	./.	./.	./.	./.	./.	
11	sporadic falling of burning droplets ²⁾	./.	./.	./.	./.	./.	
12	continuous falling of burning droplets ²⁾	./.	./.	./.	./.	./.	
13	<u>Afterflame time at the bottom of the sieve (max.)</u>	---	---	---	---	---	min:s
14	<u>Impairment of the burner by dropping or falling material:</u>						
	Time ¹⁾	./.	./.	./.	./.	./.	min:s
15	<u>Premature end of test</u>						
	Final occurrence of burning at the specimen ¹⁾	./.	./.	./.	./.	./.	min:s
16	Time of eventually end of test ¹⁾	./.	./.	./.	./.	./.	min:s
17	<u>Afterflame after end of test</u>						
	Time ¹⁾	./.	./.	./.	./.	./.	min:s
18	Number of specimen	./.	./.	./.	./.	./.	
19	Front side of specimen ²⁾	./.	./.	./.	./.	./.	
20	Back side of specimen ²⁾	./.	./.	./.	./.	./.	
21	flame length	./.	./.	./.	./.	./.	cm
22	<u>Afterglow after end of test</u>	./.	./.	./.	./.	./.	min:s
	Time ¹⁾	./.	./.	./.	./.	./.	
23	Number of specimen	./.	./.	./.	./.	./.	
	<u>Place of appearance</u>	./.	./.	./.	./.	./.	
24	Lower half of the specimen ²⁾	./.	./.	./.	./.	./.	
25	Upper half of the specimen ²⁾	./.	./.	./.	./.	./.	
26	Front side of specimen ²⁾	./.	./.	./.	./.	./.	
27	Back side of specimen ²⁾	./.	./.	./.	./.	./.	
28	<u>Density of smoke</u>						
	≤ 400 % * min	1	1	1	---	---	% * min
29	> 400 % * min ⁴⁾	./.	./.	./.	./.	./.	% * min
30	Diagram: encl. no.	1	2	3	---	---	
31	<u>Residual lengths:</u> individual value ³⁾						
	Specimen 1	68	65	61	---	---	cm
	Specimen 2	66	67	64	---	---	cm
	Specimen 3	71	68	67	---	---	cm
	Specimen 4	72	73	63	---	---	cm
32	<u>Average value, individual test ³⁾</u>	69	68	64	---	---	
33	<u>Photo of specimen in enclosure no.</u>	1	2	3	---	---	
34	<u>Flue gas temperature</u>	120	122	123	---	---	°C
35	<u>Maximum of average value</u>						
	Time ¹⁾	09:24	09:24	09:11	---	---	min:s
36	Diagram: encl. no.	1	2	3	---	---	
37	Remarks: - none -						

¹⁾ indication of times: from the begin of testing procedure

²⁾ checked off if applicable

³⁾ indication of carrier/foam layer separated in case of fire-proofing agents

⁴⁾ very strong development of smoke

6. Explanations concerning the testing procedure

There were no additional tests proceeded because of the residual length of $\geq$ than 45 cm.

7. Summary of results and additional establishments to Fire Behaviour

line no.	measurement	Result with the tested specimen					Dim
	test-no.	#2843	#2844	#2845	---	---	
	flamed direction flamed side	warp A	weft B	weft B	---	---	
1	residual length	69	68	64	---	---	cm
2	max. smoke temperature	120	122	123	---	---	°C
3	density of smoke - integral	1	1	1	---	---	%min
4	remarks: -none-						

According to DIN 4102, part 1, "schwerentflammbare" (hardly flammable) building materials must meet the requirements of class B2.

Pursuant to additional tests in the ignitability apparatus this can be determined (appendix 4 & 5).

8. Special remarks


- This report is only valid for the material as described under paragraph 1. In combination with other materials or with additional coatings or grounds etc. the burning behaviour may differ.
- This test report is not valid for the exposure to outdoor climate conditions, washing or cleaning with chemicals.
- This test report is not valid, as soon as the fabric is used as a building product in the sense of the "Landesbauordnungen" (state building requirements, MBO § 17, par. 3).
- This test report is no substitute for a General Building Inspectorate Certificate.
- This test report is granted without prejudice to the rights of third parties, im particular private proprietary rights.
- For legal interests only the German original version is relevant.
- In General Building Inspectorates procedures this test report can be based for
 - regular building materials for the required proof of accordance
 - for not regular building materials for the required proof of applicability

9. Validity

This test report is valid until the mentioned date on page 1. The test report becomes invalid in case the standards on which the tests are based are changed.

Fladungen, 04.12.2019

Clerk in charge:



(Dipl.-Ing. (FH) Jürgen Hammer)



Head of the test laboratory:



(Dipl.-Ing.(FH) Andreas Hoch)

„Brandschacht“-test #2843




measurement


#2843, PN29537: Georg+Otto Friedrich, "PES-Gewirke", A+K

Max. flue temperature: 120°C, Smoke density integral: 1%/min

Residual length: 69 cm

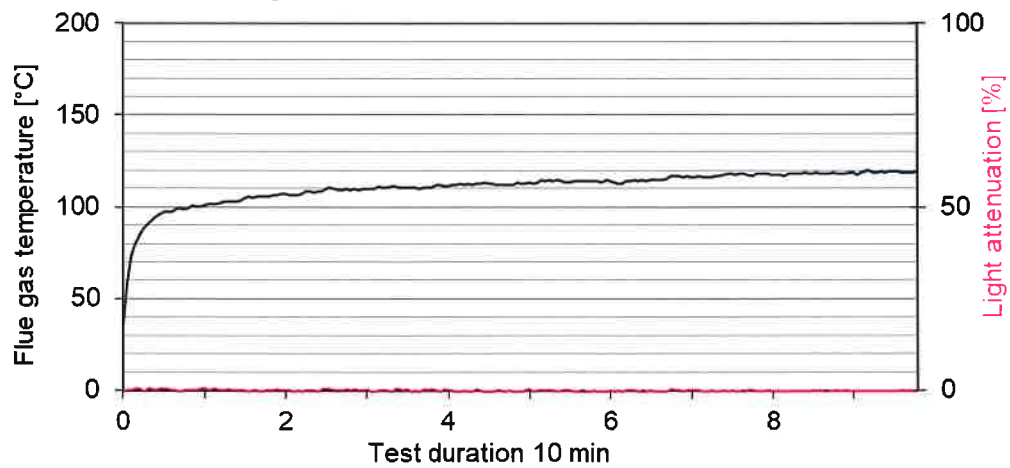

„Brandschacht“-test #2844

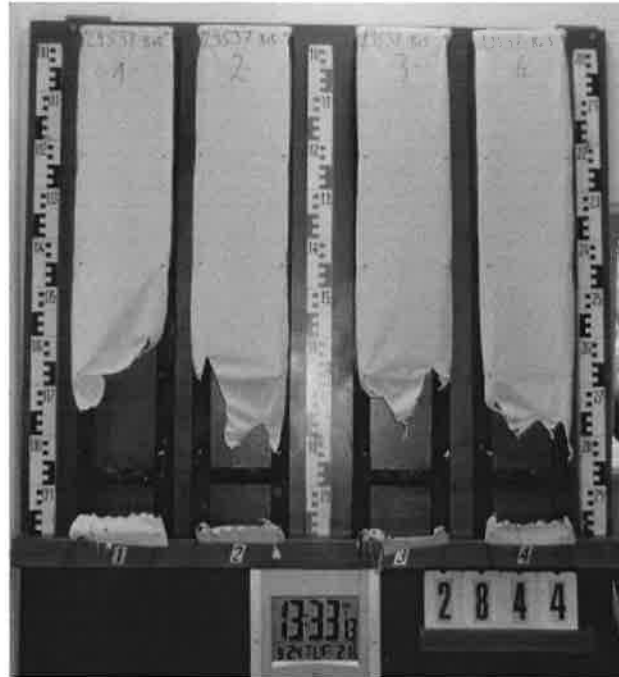


measurement

#2844, PN29537: Georg+Otto Friedrich, "PES-Gewirke", B+S

Max. flue temperature: 122°C, Smoke density integral: 1%/min

Residual length: 68 cm

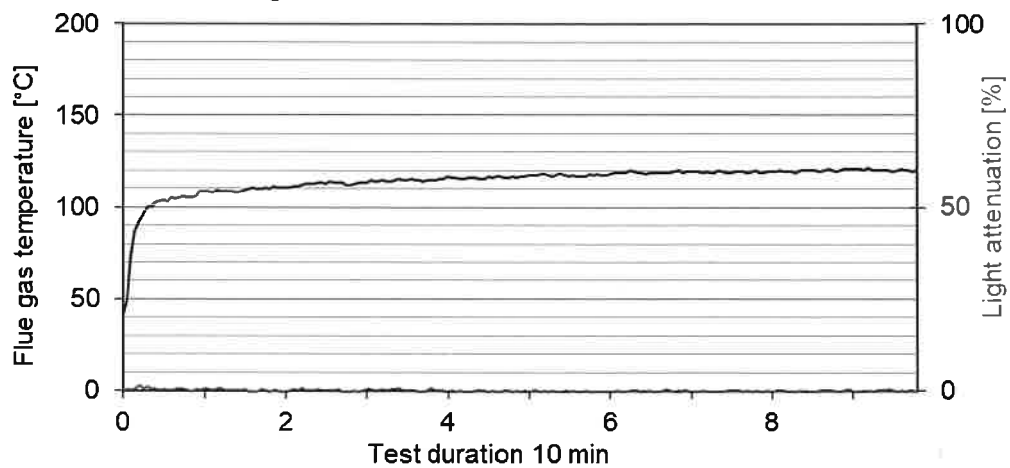

„Brandschacht“-test #2845




measurement

#2845, PN30068: Georg+Otto Friedrich, "PES-Gewirke", B+S

Max. flue temperature: 123°C, Smoke density integral: 1%min

Residual length: 64 cm

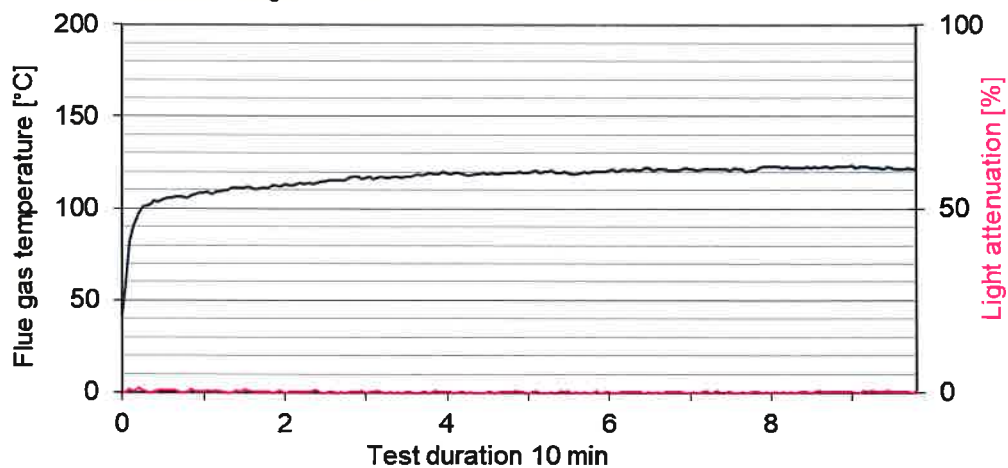

**Test for normal flammability
classifying B2 according to DIN 4102**

1. Description of test material in condition as delivered look at page 2

2. Preparation of samples

Out of the material there have been cut samples for the ignitability apparatus.
The samples were kept in a climate 23/50 until they reached constant weight.

3. Arrangement of samples -freely suspended-

flaming in warp and in weft direction / flaming side A and side B

4. Date of test CW 37 and CW 39 in 2019

5. Results

PN 30068: flaming side A in warp direction	surface-test						edge-test						Dim
samples no.	1	2	3	4	5	6	1	2	3	4	5	6	
ignition ¹⁾	2	2	2	2	2	--	1	--	--	--	--	--	s
reaching the mark of measurement ¹⁾²⁾	-/-	-/-	-/-	-/-	-/-	--	-/-	--	--	--	--	--	s
max. flame height	14	14	3	3	14	--	2	--	--	--	--	--	cm
time	7	9	3	3	8	--	1	--	--	--	--	--	
self cessation of the flames end of afterflame ¹⁾	8	10	4	4	12	--	1	--	--	--	--	--	s
end of glowing ¹⁾	-/-	-/-	-/-	-/-	-/-	--	-/-	--	--	--	--	--	s
flames were extinguished after	-/-	-/-	-/-	-/-	-/-	--	-/-	--	--	--	--	--	s
smoke development (visual)	moderate						little						
dropping of burning material during 20 s ¹⁾	-/-	-/-	-/-	-/-	-/-	--	-/-	--	--	--	--	--	s
Appearance after test: burned out till max. height 13 cm x width 6 cm													

PN 30068: additional tests	edge-test						surface-test						Dim
samples no.	1	2	3	4	5	6	1	2	3	4	5	6	
ignition ¹⁾	1	1	1	--	--	--	2	2	2	--	--	--	s
reaching the mark of measurement ¹⁾²⁾	-/-	-/-	-/-	--	--	--	-/-	-/-	-/-	--	--	--	s
max. flame height	2	2	2	--	--	--	11	3	2	--	--	--	cm
time	1	1	1	--	--	--	8	3	3	--	--	--	s
self cessation of the flames end of afterflame ¹⁾	1	1	1	--	--	--	8	3	3	--	--	--	s
end of glowing ¹⁾	-/-	-/-	-/-	--	--	--	-/-	-/-	-/-	--	--	--	s
flames were extinguished after	-/-	-/-	-/-	--	--	--	-/-	-/-	-/-	--	--	--	s
smoke development (visual)	little						moderate						
dropping of burning material during 20 s ¹⁾	-/-	-/-	-/-	--	--	--	-/-	-/-	-/-	--	--	--	s
Appearance after test: burned out till max. height 6 cm x width 13 cm													

¹⁾ time mentioned from the beginning of the test ²⁾ during 20 Sec -/- no appearance -- no information

PN 29537: additional tests	edge-test						surface-test						Dim
samples no.	1	2	3	4	5	6	1	2	3	4	5	6	
ignition ¹⁾	1	1	1	1	--	--	2	2	2	1	--	--	s
reaching the mark of measurement ¹⁾²⁾	-/-	-/-	-/-	-/-	--	--	-/-	-/-	-/-	-/-	--	--	s
max. flame height	6	7	5	4	--	--	5	3	3	3	--	--	cm
time	20	14	4	4	--	--	10	5	5	5	--	--	s
self cessation of the flames end of afterflame ¹⁾	20	14	5	4	--	--	15	6	6	6	--	--	s
end of glowing ¹⁾	-/-	-/-	-/-	-/-	--	--	-/-	-/-	-/-	-/-	--	--	s
flames were extinguished after	-/-	-/-	-/-	-/-	--	--	-/-	-/-	-/-	-/-	--	--	s
smoke development (visual)	moderate						moderate						
dropping of burning material during 20 s ¹⁾	-/-	-/-	-/-	-/-	--	--	-/-	-/-	-/-	-/-	--	--	s
Appearance after test: burned out till max. height 7 cm x width 9 cm													

¹⁾ time mentioned from the beginning of the test ²⁾ during 20 Sec -/- no appearance -- no information

6. Remarks and explanations to the testing procedure - none –

7. Opinion concerning the dropping of burning material

The test for normal flammability shows no burning dripping material.